

**TECHNICAL PROPERTIES** 


## PRODUCT DETAILS

FACTS

Surface treatment	Ultra matt lacquer The appearance of the matte surface may vary due to different light sources and angles.	Design	1-strip	Moisture EN13183 content	EN13183	7%±2%
		Grading	Calm			
		Range	Kährs Original	Minimun Mean Density kg/m <sup>3</sup> >500 kg/m <sup>3</sup>		
		Collection	Lux Collection	Reaction To Fire	EN13501-1	Dfl-s1
Dimensions	2420 x 187 x 15 mm	Resandable	2-3 times	Formaldehyde	EN717-1	E1
Weight per Package (kg)	22 kg	Natural/Stained	Stained	Emission		
Area per Package (m²)	2.7 m <sup>2</sup>	Brinell Value	4,0	Content PCP	CEN/TR14823	≤ 5 x 10-6n
Area per pallet (m²)	122.4 m <sup>2</sup>	Joint	Woodloc® 5S	Breaking	EN1533	NPD
Package info	Packages may contain start and stop boards.	Floor heating	Yes	Strength N/mm <sup>2</sup>		
		Warranty	30 years	Thermal	EN12664	0,14 W/mK
		Wear-layer material	Hardwood	Conductivity		
		Wear Layer Thickness	-	Thermal Resistance R-Value		.11 (m2K/W)
DETAIL DESCRIPTION		(mm)		Biological	EN350-2	Class 1
knots in limited numbers allowed.		Core material	Pine/Spruce/Alder	Durability		
		Thickness (mm)	15 mm	CARB2		Compliant
		Installation method	Floating, Glue-down	Slipperiness	CEN/TS15676	NPD
Stained product - noticable color change over time		Surface Colour	White			
		LRV	76 (std. dev. 2.8)			

AB GUSTAF KÄHR | www.kahrs.com | © Kährs 2022

## Other products in this collection

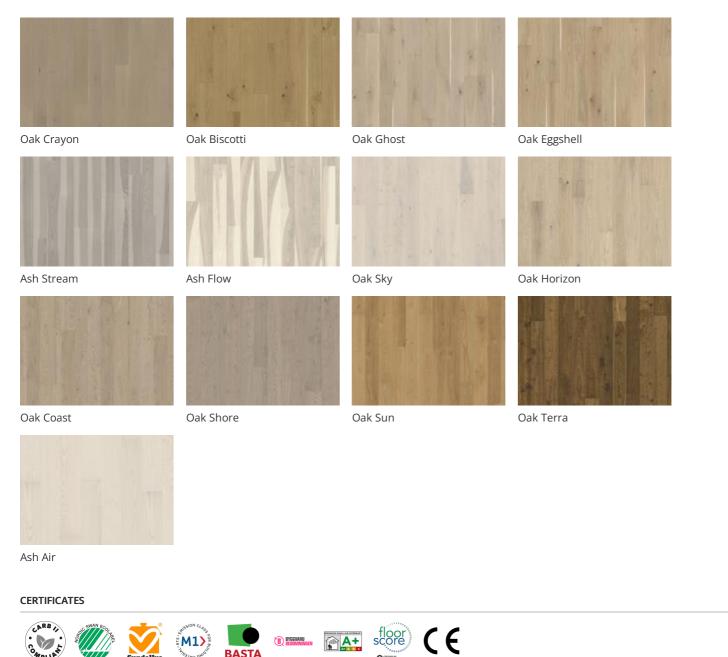

## **Descriptions & Imagery**

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.